




Camera IP Dome 4Mp antivandalo IK10 Ottica Motorizzata 2.7~13.5mm

Camera IP Dome, risoluzione 4Mp con 20Fps, antivandalo IK10, da interno/esterno IP67, con sensore CMOS progressivo 1/3", H.265+/H.264, ICR meccanico, ottica motorizzata 2.7~13.5mm con regolazione su 3 assi, luminosità 0.03Lux f1.4 (0 con IR on), led IR portata fino a 30mt, 1 slot per MicroSD-Card (max 128Gb), porta LAN 10/100, privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc/PoE <8.5W, compatibile ONVIF

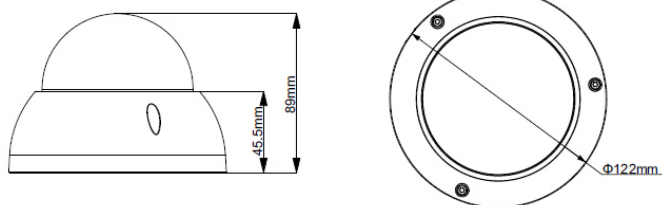

ACCESSORI (OPTIONAL)



ACM207



ACM253




ACM262



ACM217



ACM257



ACM202

CARATTERISTICHE TECNICHE

Camera	NDV401MA				
Image Sensor	1/3" 4Megapixel progressive CMOS				
Effective Pixels	2688(H) x 1520(V)				
RAM/ROM	512MB/32MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s				
Minimum Illumination	0.03Lux/F1.4(Color, 1/3s, 30IRE) 0.3Lux/F1.4(Color, 1/30s, 30IRE) 0Lux/F1.4(IR on)				
S/N Ratio	More than 50dB				
IR Distance	Distance up to 30m(98ft)				
IR On/Off Control	Auto/ Manual				
IR LEDs	2				
Lens					
Lens Type	Motorized				
Mount Type	Board-in				
Focal Length	2.7mm~13.5mm				
Max. Aperture	F1.4				
Angle of View	H:104°~28°, V:55°~16°				
Focus Control	Motorized				
Close Focus Distance	0.2m				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	64m(210ft)	26m(85ft)	13m(43ft)	6m(20ft)
	T	222m(728ft)	89m(292ft)	44m(144ft)	22m(72ft)
PTZ					
Pan/Tilt Range	Pan:0° ~355° ;Tilt:0° ~75° ;Rotation:0° ~355°				
Intelligence					
IVS	Tripwire, Intrusion				
Video					
Compression	H.265+/H.265/H.264+/H.264				
Streaming Capability	2 Streams				
Resolution	(2688x1520)/(2560x1440)/(2304x1296)/1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x960)/720P(1280x720)/D1(704x576/704x480)/VGA(640x480)/CIF(352x288/352x240)				
Frame Rate	4M (1 ~ 20fps)/3M(1 ~ 25/30fps) D1/CIF(1 ~ 20/25fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.265: 12K ~ 8448Kbps H.264: 32K ~ 10240Kbps				
Day/Night	Auto(ICR) / Color / B/W				
BLC Mode	BLC / HLC / WDR(120dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detetion	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization(EIS)	N/A				
Smart IR	Support				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
Audio					
Compression	G.711A/G.711Mu/G.726/AAC				
Network					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP;TCP;ARP;RTSP;RTP;UDP;RTCP;SMTP;FTP;DHCP;DNS;DDNS;PPPOE;IPV4/V6;SNMP;QoS;UPnP;NTP				
Interoperability	ONVIF, PSIA, CGI				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS Local PC for instant recording Micro SD Card 128GB				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, Easy4ip				
Smart Phone	IOS, Android				
Interface					
Video Interface	N/A				
Audio Interface	1/1 channel In/Out				
RS485	N/A				
Alarm	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC				
Electrical					
Power Supply	DC12V PoE (802.3af)(Class 0)				
Power Consumption	<8.5W				
Environmental					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
Vandal Resistance	IK10				
Construction					
Casing	Metal				
Dimensions	φ122mm×88.9mm(4.80"×3.50")				
Net Weight	0.4Kg (0.88lb)				
Gross Weight	0.54Kg(1.19lb)				