




## CARATTERISTICHE TECNICHE

### PENTA-IBRIDO 32 canali HD-CVI/CVBS/TVI/AHD

PENTA-IBRIDO 32 canali, HDCVI/CVBS/TVI/AHD fino a 1.080p (con 25Fps) o 32 canali IP a 6Mp, H265+/H264, rapporto risoluzione/frame e bit rate variabile (32~6.144Kbps) per singolo canale, massima banda in REC 128Mbps, 3 uscite video principali (HDMI1 fino a 3840x2160 + 1 VGA + 1 BNC), 1 ingresso e 1 uscita audio, slot per 2 dischi SATA (fino a 10TB cad.), 2 porte USB (mouse, backup), 1 porta RS485, 1 LAN 10/100/1.000Mbps, alimentazione interna a 220Vac (max 25W senza HD), analisi video intelligente, compatibile ONVIF, con HD da 2TB installato.

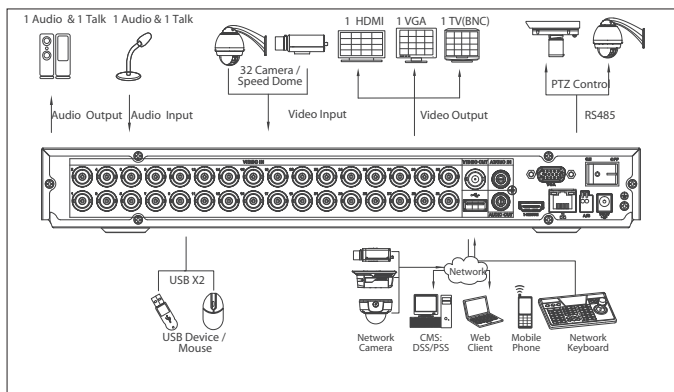

<b>System</b>	<b>NVX322L3</b>
Main Processor	Embedded Processor
Operating System	Embedded LINUX
<b>Display</b>	
Interface	1 HDMI, 1 VGA, 1 TV
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Multi-screen Display	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Video Detection and Alarm</b>	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss and Tampering
Alarm input	N/A
Relay Output	N/A
<b>Playback and Backup</b>	
Playback	1/4/9/16
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network
<b>Storage</b>	
Internal HDD	2 SATA Ports, up to 8TB capacity for each disk
eSATA	N/A
<b>Auxiliary Interface</b>	
USB	2 USB Ports (1 USB 3.0, 1 USB 2.0)
RS232	N/A
RS485	1 Port, for PTZ Control
<b>Third-party Support</b>	
Third-party Support	Pixvideo, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dahua, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
<b>Audio and Video</b>	
HDCVI Camera Input	32 Channel
IP Camera Input	32 Channel, each channel up to 5MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA
<b>Recording</b>	
Compression	H.264+/H.264
Resolution	1080P, 1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main stream: 1080P(1~15fps) 1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) Sub stream: D1/CIF/QCIF(1~15fps)
Bit Rate	1Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
<b>Network</b>	
Interface	1 RJ-45 Port (1000M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.42, CGI Conformant
<b>Electrical</b>	
Power Supply	DC12V/5A
Power Consumption	<20W (Without HDD)
<b>Environmental</b>	
Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0~ 90% RH
<b>Construction</b>	
Dimensions	1U, 375mm×287mm×53mm (14.8" x 11.3" x 2.1")
Net Weight	2kg (4.41lb) (without HDD)
Gross Weight	3.18kg (7.01lb)
Installation	Desktop installation