




## Postazione esterna IP o bifilare

Postazione esterna modulare IP o bifilare, in alluminio con telecamera sensore 2MP CMOS e illuminazione IR led, connessione tramite porta LAN, 1 uscita a relè per comando apri porta mono familiare espandibile con modulo relè VAE010R su RS485 (max. 1), 2 ingressi di allarme, alimentazione 12Vdc o Standard PoE (802.3af) o con VAE064-2 e VAE025, consumo massimo 12W, montaggio a incasso o in superficie con appositi contenitori opzionali, grado IP65 (con utilizzo di silicato di sodio liquido), antivandalica IK07, temperatura di esercizio -20 ~ +60°. (100.0x100.0x49.3mm). Compatibile per sistemi ibridi bifilari.

## PIXVIDEO

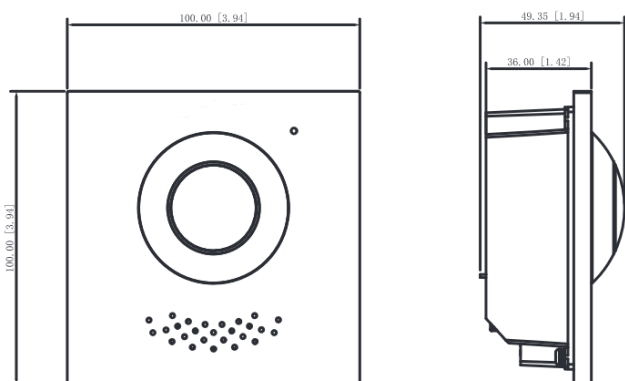

Operating Humidity	10%–90% (RH, non-condensing)
Operating Altitude	0 m–3000 m
Power Consumption	≤ 12W
Net Weight	0.35 kg (0.77lb)
Gross Weight	0.4 kg (0.88lb)

## CARATTERISTICHE TECNICHE

### Technical Specification

Model	VEM030A
<b>System</b>	
Main Processor	Embedded processor
Operating System	Embedded Linux Operation System
Button Type	Mechanical
Interoperability	ONVIF; CGI
Network Protocol	SIP; P2P; IPv4; UPnP; SNMP; DNS; DDNS; RTSP; RTP; TCP; UDP
<b>Basic</b>	
Camera	1/2.5" 2MP CMOS Low Illumination HD Colorful Fisheye Camera
Field of View	Horizontal: 168.6°; Vertical: 87.1°; Diagonal: 176.7°
Focal Length	1.9 mm
WDR	120 dB
Noise Reduction	3D DNR
Video Compression	H.265
Video Resolution	50Hz: Main Stream (720P@25 fps), sub stream (1080P@25 fps) 60Hz: Main Stream (720P@30 fps), sub stream (1080P@30 fps)
Video Frame Rate	25 fps
Video Bit Rate	256 Kbps to 4 Mbps
Light Compensation	Auto IR
Day/Night	Auto (ICR)
Audio Compression	G.711a; G.711u; PCM
Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	2-way voice communication
Audio Enhancement	Echo suppression/digital noise reduction
Audio Bit Rate	16 KHz, 16 Bit
Status Indicator Light	3
<b>Port</b>	
RS-485 Port	1
Alarm Output	1
Power Output	1-ch 12 VDC 100mA
Exit Button	1
Door Status Detection	1
Lock Control	1
Network Port	One RJ45 10M/100M network port
<b>General</b>	
Appearance color	Silver
Power Supply	DC 48V 1A Standard PoE
Power Adapter	Optional
Installation	Flush/surface mount
Certifications	CE; FCC; UL
Accessory	Flush/surface mount
Product Dimensions	100 mm × 100 mm × 36 mm (3.94" × 3.94" × 1.41")
Protection	IK07; IP65
Operating Temperature	-30°C to +60°C (-22°F to 140°F)

Rev. 180127

Le immagini e le caratteristiche tecniche possono subire variazioni senza preavviso da parte del produttore