




Monitor interno intercomunicante IP

Monitor interno intercomunicante IP con cornetta, con altre postazioni interne compatibili, display LCD da 7", risoluzione 1.024x600, 1 porta LAN 10/100Mbps, Wi-Fi, touch screen capacitivo, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, slot microSD-Card max 32Gb, installazione da parete o da tavolo con VAM007TAV, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 5W. Cornice bianca. (236x165.5x43.2 mm)

PIXVIDEO

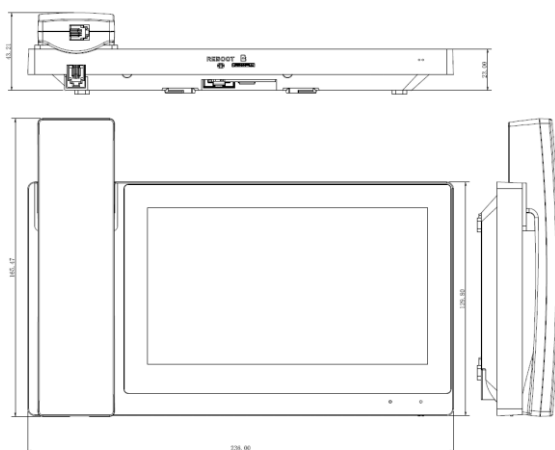

CARATTERISTICHE TECNICHE

Technical Specification

Model	VIP077W-HW
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 1024x600, Capacitive
Operation Mode	
Input	Touch screen
Interface	
Alarm In	6
Alarm Out	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32GB
Installation	Surface & Desktop
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby $\leq 3.5W$, Work $\leq 5W$
Working Temperature	$-10^{\circ}C \sim +55^{\circ}C$
Relative Humidity	10%~90%RH
Dimensions	236mm×165.5mm×43.2mm
Weight	0.9Kg

