




## Telecamera Dome

Telecamera Dome HDCVI STARLIGHT da esterno/interno IP67, sensore progressivo 1/2.8" CMOS da 2Mp, risoluzione 1.080p con 25Fps, ICR meccanico, ottica motorizzata 2.7~13,5mm, luminosità 0.001Lux f1.5 (0 Lux con IR on), led IR portata fino a 60mt, 1 ingresso audio con microfono incorporato, 2-3D, WDR, 1 uscita video (HDCVI o AHD o TVI o CVBS), OSD su cavo coassiale, alimentazione 12Vdc, <6,4W. (Φ135.0mm×109.0mm)

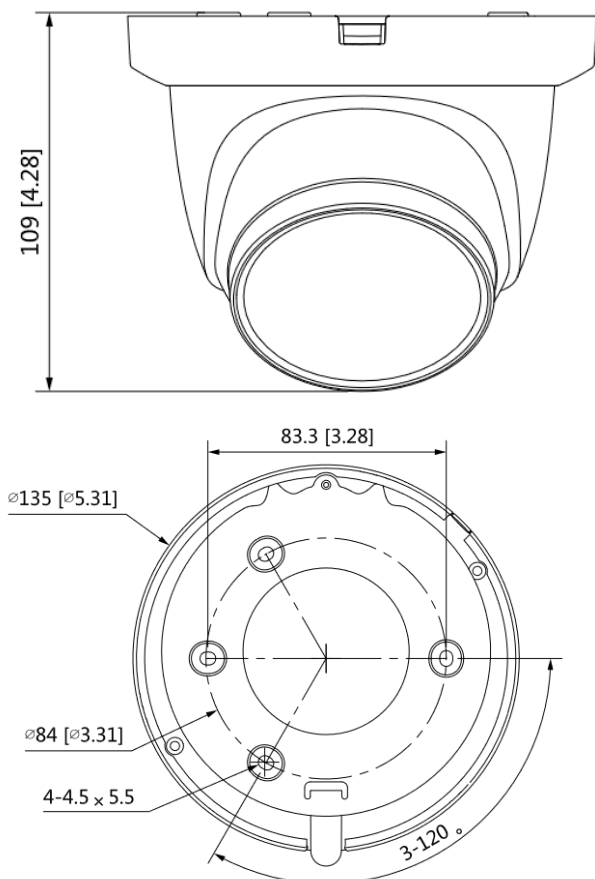

## CARATTERISTICHE TECNICHE

Technical Specification		
Model	HDV208SM	
<b>Camera</b>		
Image Sensor	2MP CMOS	
Max. Resolution	1920 (H) × 1080 (V)	
Pixel	2MP	
Scanning System	Progressive	
Electronic Shutter Speed	PAL: 1/25 s–1/100000 s NTSC: 1/30 s–1/100000 s	
S/N Ratio	> 65 dB	
Min. Illumination	0.001Lux/F1.6, 30IRE, 0Lux IR on	
Illumination Distance	60m (196.9 ft)	
Illuminator On/Off Control	Auto	
Illuminator Number	2 (IR light)	
Pan/Tilt/Rotation Range	Pan: 0°–360°	
	Tilt: 0°–78°	
	Rotation: 0°–360°	
<b>Lens</b>		
Lens Type	Motorized Vari-focal	
Auto Focus	Yes	
Mount Type	φ14	
Focal Length	2.7 mm-13.5mm	
Max. Aperture	F1.5	
Field of View	Diagonal: 131°~35°	
	Horizontal: 108°~30°	
	Vertical: 56°~17°	
Iris Type	Fixed	
Close Focus Distance	0.8 m (2.6 ft)	
<b>Video</b>		
Frame Rate	CVI: PAL:1080P@25fps; NTSC:1080P@30fps; AHD: PAL:1080P@25fps; NTSC:1080P@30fps; TVI: PAL:1080P@25fps; NTSC:1080P@30fps; CVBS: PAL:960×576H; NTSC:960×480H;	
	Resolution	1080P (1920 × 1080); 960H (960 × 576/960 × 480)
	Day/Night	Auto switch by ICR
	BLC	BLC/WDR/HLC
	WDR	130dB
	White Balance	Auto/Area WB
Gain Control	Auto; manual	
Noise Reduction	3D NR	
Smart IR	Yes	
Mirror	Yes	
Privacy Masking	Off/On (8 area, rectangle)	

<b>Certifications</b>	
Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
<b>Port</b>	
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port (DIP Switch)
Audio Input	One channel built-in mic
<b>Power</b>	
Power Supply	12V ±30% DC
Power Consumption	Max 6.4W (12V DC, IR on)
<b>Environment</b>	
Operating Temperature	-30°C~+60°C (-22°F to 140°F); < 95% (non-condensation)
Storage Temperature	-30°C~+60°C (-22°F to 140°F); < 95% (non-condensation)
Protection Grade	IP67
<b>Structure</b>	
Casing	Metal dome + metal cover + plastic decorative ring
Camera Dimensions	φ135 mm × 109 mm (φ5.31" × 4.28")
Net Weight	0.51 kg (1.1lb)
Gross Weight	0.69 kg (1.5lb)

### DORI Distance

DORI Distance	2.7 mm: D: 44.1 m (144.7 ft); O: 17.6 m (57.7 ft); R: 8.8 m (28.9 ft); I: 4.4 m (14.4 ft) 13.5 mm: D: 144.8 m (475.1 ft); O: 57.9 m (190 ft); R: 28.9 m (94.8 ft); I: 14.8 m (48.6 ft)
---------------	---