




Telecamera Bullet HDCVI

Telecamera Bullet HDCVI STARLIGHT da 5Mp a 25fps, da esterno/interno IP67, sensore CMOS progressivo 1/2.7", ottica 3.6mm, luminosità 0.005Lux/F1.6, (0 Lux con IR on), led SMART IR portata fino a 30mt, 2-3D, WDR, OSD menù su cavo coassiale, 1 uscita video (HDCVI o AHD o TVI o CVBS), OSD su cavo coassiale, alimentazione 12Vdc <3.2W. (174.5mm×72.3mm×70.6mm)

PIXVIDEO

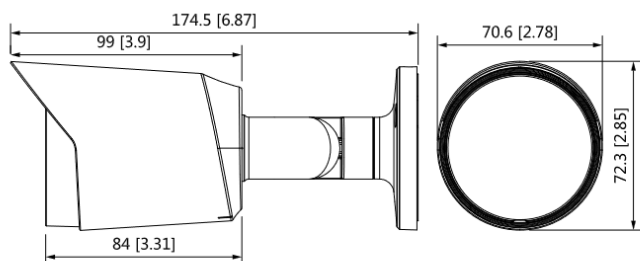

CARATTERISTICHE TECNICHE

Technical Specification

Model	HBF500S-G
Camera	
Image Sensor	1/2.7" CMOS
Effective Pixels	2592(H)×1944(V), 5MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination	0.02Lux/F1.85, 30IRE, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 30m (98feet)
IR On/Off Control	Auto / Manual
IR LEDs	1
Lens	
Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	3.6mm (2.8mm, 6mm Optional)
Max Aperture	F1.85
Angle of View	H: 77.5° (93°/49°)
Focus Control	N/A
Close Focus Distance	1400mm (800mm/2800mm) 55" (31.5"/110")
Pan / Tilt / Rotation	
Pan/Tilt/Rotation	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°
Video	
Resolution	5MP (2592×1944)
Frame Rate	20fps@5MP, 25/30fps@4MP, 25/30fps@1080P
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / DWDR
WDR	DWDR
Gain Control	AGC
Noise Reduction	2D
White Balance	Auto / Manual
Smart IR	Auto / Manual
Certifications	
Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
Interface	
Audio Interface	N/A
Electrical	
Power Supply	12V DC ±30%
Power Consumption	Max. 3.7W (12V DC, IR on)

Environment	
Operating Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH *Start up should be done at above -40°C (-40°F)
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH
Ingress Protection & Vandal Resistance	IP67
Structure	
Casing	Aluminium
Dimensions	174.5mm×72.3mm×70.6mm
Net Weight	0.37kg (0.82lb)
Gross Weight	0.48kg (1.06lb)

DORI Distance

	DORI Definition	Distance
Detect	25px/m (8px/ft)	2.8mm: 56m(184ft)
		3.6mm: 80m(262ft)
		6mm: 120m(394ft)
Observe	63px/m (19px/ft)	2.8mm: 22m(72ft)
		3.6mm: 32m(105ft)
		6mm: 48m(157ft)
Recognize	125px/m (38px/ft)	2.8mm: 11m(36ft)
		3.6mm: 16m(53ft)
		6mm: 24m(79ft)
Identify	250ppm (76px/ft)	2.8mm: 6m(21ft)
		3.6mm: 8m(26ft)
		6mm: 12m(39ft)