





Telecamera Bullet HDCVI

Telecamera Bullet HDCVI STARLIGHT da 5Mp a 25fps, da esterno/interno IP67, sensore progressivo 1/2.7" CMOS, ICR meccanico, ottica motorizzata 2.7~12mm, luminosità 0.005Lux f1.6 (0 Lux con IR on), led IR portata fino a 60mt, 2-3D, WDR, 1 uscita video (HDCVI o AHD o TVI o CVBS), OSD su cavo coassiale, alimentazione 12Vdc <9.8W. (209.9mm×90.4mm×90.4mm)

PIXVIDEO

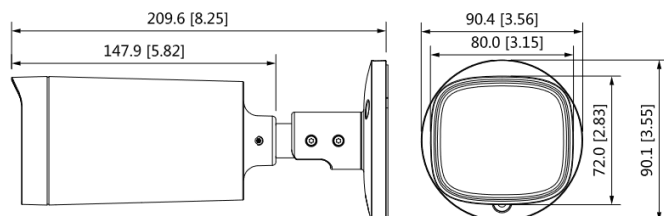

CARATTERISTICHE TECNICHE

Technical Specification

Model	HBV500SM-G	
Camera		
Image Sensor	1/2.7 inch CMOS	
Effective Pixels	2592 (H) × 1944 (V), 5MP	
Scanning System	Progressive	
Electronic Shutter Speed	PAL: 1/25s–1/100000s NTSC: 1/30s–1/100000s	
S/N Ratio	>65dB	
Minimum Illumination	0.02Lux/F1.8, 30IRE, 0Lux IR on	
Fill Light Working Distance	60 m (196.85 ft)	
IR On/Off Control	Auto; manual	
IR LED Number	4	
Pan/Tilt/Rotation Range	Pan: 0°–360°	
	Tilt: 0°–90°	
	Rotation: 0°–360°	
Lens		
Lens Type	Motorized-focal	
Mount Type	φ14	
Focal Length	2.7 mm–12 mm	
Max. Aperture	F1.8–F3.3	
Angle of View	2.7 mm: 122° × 93° × 68°	
	12 mm: 37° × 30° × 22°	
Iris Type	Fixed iris	
Auto Focus	N/A	
Close Focus Distance	0.8 m (2.62 ft)	
Video		
Frame Rate	CVI: PAL: 5M@20fps; 4M@25fps; 1080P@25fps; NTSC: 5M@20fps; 4M@30fps; 1080P@30fps AHD: PAL: 5M@20fps; 4M@25fps; 1080P@25fps; NTSC: 5M@20fps; 4M@30fps; 1080P@30fps TVI: PAL: 5M@20fps; 4M@25fps; 1080P@25fps; NTSC: 5M@20fps; 4M@30fps; 1080P@30fps CVBS: PAL: 960H; NTSC: 960H	
	Resolution	5M (2592 × 1944); 4M (2560 × 1440); 1080P (1920 × 1080); 960H (960 × 576/960 × 480)
	Day/Night	Auto switch by ICR
	BLC	BLC/HLC/WDR
	WDR	DWDR
	White Balance	Auto; manual
	Gain Control	Auto; manual
	Noise Reduction	2D NR
	Smart IR	Yes
	Mirror	Off/On
Privacy Masking	Off/On (8 area, rectangle)	

Certifications	
Certifications	CE (EN55032, EN55024, EN50130-4, EN60950-1) FCC (CFR 47 FCC Part 15 subpart B, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
Port	
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Power	
Power Supply	12V ±30% DC
Power Consumption	Max 12W (12V DC, IR on)
Environment	
Operating Temperature	-40°C to +60°C (-40°F to 140°F); <95% (non-condensation)
Storage Temperature	-40°C to +60°C (-40°F to 140°F); <95% (non-condensation)
Protection Grade	IP67
Structure	
Casing	Metal throughout the whole casing
Camera Dimensions	209.9 mm × 90.4 mm × 90.4 mm (8.26" × 3.56" × 3.56")
Net Weight	570g (1.25lb)
Gross Weight	740g (1.63lb)

DORI Distance

	Optica	Detect	Observe	Recognize	Identify
DORI	2.7 mm	69 m	27.6 m	13.8 m	6.9 m
	12 mm	191.6 m	76.64 m	38.32 m	19.16 m