




Telecamera Dome HDCVI

Telecamera Dome HDCVI STARLIGHT da 5Mp a 25fps, da esterno/interno IP67, sensore CMOS progressivo 1/2.7", ICR meccanico, ottica motorizzata 2.7~12mm, luminosità 0.005Lux f1.6 (0 Lux con IR on), led IR portata fino a 60mt, 1 ingresso audio con microfono incorporato, 2-3D, WDR, 1 uscita video (HDCVI o AHD o TVI o CVBS), OSD su coassiale, alimentazione 12Vdc<8.2W. (Φ 135.0mm × 109.0mm).

PIXVIDEO

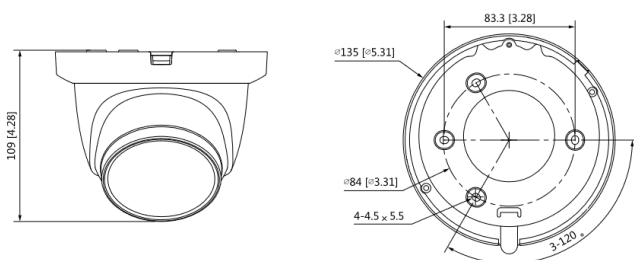

CARATTERISTICHE TECNICHE

Technical Specification

Model	HDV500SM-G
Camera	
Image Sensor	1/2.7 inch CMOS
Max. Resolution	2880 (H) × 1620 (V)
Pixel	5MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25 s–1/100000 s NTSC: 1/30 s–1/100000 s
S/N Ratio	> 65 dB
Min. Illumination	0.005 Lux/F1.6, 30IRE, 0 Lux IR on
Illumination Distance	60 m (196.9 ft)
Illuminator On/Off Control	Auto; manual
Illuminator Number	2
Lens	
Lens Type	Motorized vari-focal
Auto Focus	N/A
Mount Type	φ14
Focal Length	2.7 mm–12 mm
Max. Aperture	F1.6
Field of View	Diagonal: 39°–130° Horizontal: 34°–107° Vertical: 19°–55°
Iris Type	Fixed iris
Close Focus Distance	0.5 m (1.64 ft)
Video	
Frame Rate	CVI: PAL: 5M@25 fps; 4M@25 fps; 1080P@25 fps NTSC: 5M@25 fps; 4M@30 fps; 1080P@30 fps AHD: PAL: 4M@25 fps; NTSC: 4M@30 fps TVI: PAL: 4M@25 fps; NTSC: 4M@30 fps CVBS: PAL: 960H; NTSC: 960H
Resolution	5M (2880 × 1620); 4M (2560 × 1440); 1080p (1920 × 1080); 960H (960 × 576/960 × 480)
Day/Night	Auto switch by ICR
BLC	BLC/HLC/DWDR
WDR	DWDR
White Balance	Auto; manual
Gain Control	Auto; manual
Noise Reduction	2D NR
Smart IR	Yes
Mirror	Off/On
Privacy Masking	Off/On (8 area, rectangle)

Certifications	
Certifications	CE (EN55032:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN55024:2010+A1:2015, EN 55035:2017, EN50130-4:2011+A1:2014, EN 62368-1:2014+A11:2017) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
Port	
Audio Output	One channel built-in mic
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Power	
Power Supply	AC 24V ±25% / DC 12V ±10%
Power Consumption	Max 8.2W (12V DC, IR on)
Environment	
Operating Temperature	-30°C to +60°C (-40°F to 140°F);<95% (non-condensation)
Storage Temperature	-30°C to +60°C (-40°F to 140°F);<95% (non-condensation)
Protection Grade	IP67
Structure	
Casing	Metal dome + metal cover + plastic decorative ring
Camera Dimensions	φ135 mm × 109 mm (φ5.31" × 4.28")
Net Weight	0.52 kg (1.15 lb)
Gross Weight	0.62 kg (1.37 lb)

DORI Distance

DORI Distance		Detect	Observe	Recognize	Identify
		2.7 mm	69 m (226.37 ft)	27.6 m (90.55 ft)	13.8 m (45.27 ft)
	12 mm	191.6 m (628.6 ft)	76.64 m (251.44 ft)	38.32 m (125.72 ft)	19.16 m (62.86 ft)