




Postazione esterna

Postazione esterna in materiale plastico finitura nera, telecamera sensore CMOS 1/4" da 1Mp, finitura nera, 1 porta LAN 10/100Mbps, 1 uscita a relè per comando apri porta mono familiare espandibile con modulo relè VAE010R su RS485 (max. 1), pulsantiera meccanica, slot microSD-Card max 32Gb, lettore tessere RFID integrato, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 10W, montaggio in superficie, IP65 (con utilizzo di silicato di sodio liquido), temperatura di esercizio -30 ~ +60°. (135.0 x 70.4 x 34.4mm)

PIXVIDEO

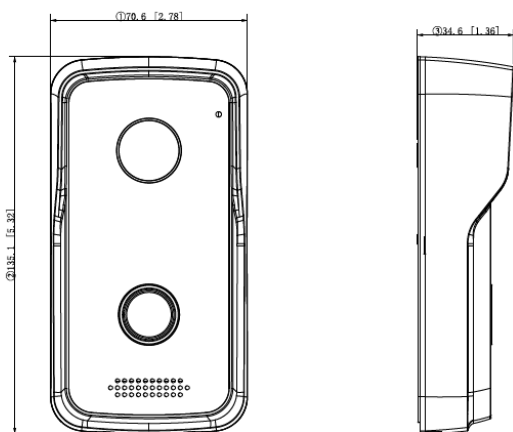

CARATTERISTICHE TECNICHE

Technical Specification

Model	VEP012B
System	
Main Processor	Embedded processor
Operation System	Embedded LINUX operating system
Button Type	Mechanical
Interoperability	ONVIF
Internet Protocol	SIP; P2P; IPv4; DNS; RTSP; RTP; TCP; UDP
Basic	
Camera	1/4" 1MP CMOS high definition, low illumination/WDR, color/IR
Angle of View	Horizontal: 107°; vertical: 61°; diagonal: 122°
WDR	120dB
Noise Reduction	3D noise reduction
Video Compression	H.264
Video Resolution	Main stream: WVGA, 720P, D1 Sub stream: CIF, WVGA, QVGA, 1080P, D1
Frame Rate	PAL: 25 fps NTSC: 30 fps
Video Bit Rate	256K to 4M
Light Compensation	Auto IR
D/N	ICR auto switch
Audio	
Audio Compression	G.711a; G.711u; PCM
Audio Input	1
Audio Output	Built-in speaker
Audio Mode	Two-way voice call
Audio Enhancement	Echo suppression and cancellation/digital noise reduction
Audio Bit Rate	16KHz, 16Bit
Function	
Communication	Fully digital
Unlock Mode	Card/App remote/indoor monitor unlock
Card Type	IC card
Motion Detection	Video motion detection
Auto Snapshot	Auto snapshot can only be enabled on indoor monitors
Leave Photos and Messages	Yes (Insert an SD card into the indoor monitor)
Web Configuration	Yes
Performance	
Card Reading Distance	3cm-5cm
Casing	PC+Acrylic
Capacity	
Card	10,000
Port	
RS-485	1
Electric Lock	1
Exit Button	1
Door Status Detection	1
Lock Control	1, normally closed by default
Network	1 10Mbps/100Mbps network port (8-core white ribbon cable)

Alarm	
Tamper	Yes
General	
Color	Black
Power Supply Mode	12V DC 1A Standard PoE
Installation	Surface mount
Certifications	CE FCC UL
Accessory	Brackets and alarm ribbon cable
Dimensions	135mm×70.4mm×34.4mm (5.31"×2.77"×1.35")
Protection Grade	IP65 (silicone sealant is needed, see the quick start guide)
Operating Temperature	-30°C to +60°C (-20°F to +60°F)
Operating Humidity	10%RH–90%RH (non-condensing)
Operating Altitude	Beneath 3000 m (9842.52 ft)
Power Consumption	Standby≤1W, working≤5W
Gross Weight	326 g (0.72 lb)

Rev. 180127

Le immagini e le caratteristiche tecniche possono subire variazioni senza preavviso da parte del produttore