




Postazione esterna IP

Postazione esterna IP con frontale in lega di zinco con telecamera sensore 2MP CMOS e illuminazione IR led, connessione tramite porta LAN, 1 uscita a relè per comando apri porta mono familiare espandibile con modulo relè VAE010R su RS485 (max. 1), 2 pulsanti meccanici, lettore tessere RFID integrato, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 10W, montaggio in superficie, grado IP65 (con utilizzo di silicato di sodio liquido), antivandalica IK08, temperatura di esercizio -30 ~ +60°. (182.0x30.0x101.0mm)


PIXVIDEO

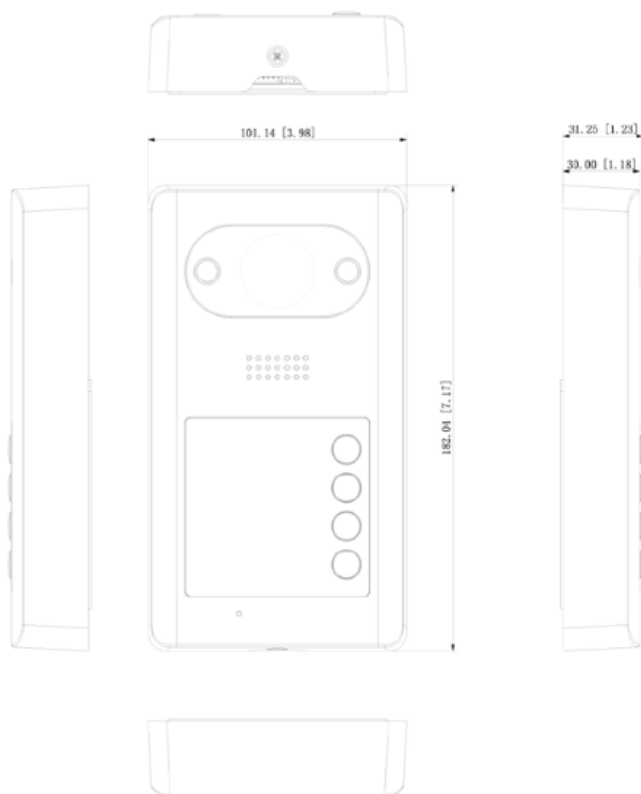

CARATTERISTICHE TECNICHE

Technical Specification

Model	VEP014Z2
System	
Main Processor	Embedded processor
Operating System	Embedded Linux operating system
Button Type	Mechanical
Interoperability	ONVIF
Network Protocol	SIP; P2P; IPv4; DNS; RTSP; RTP; TCP; UDP
Basic	
Camera	1/2.8" 2MP CMOS high definition, low illumination/WDR/color/IR
Angle of View	Horizontal: 129°; vertical: 74°; diagonal: 147
WDR	120dB
Noise Reduction	3D noise reduction
Video Compression	H.264
Video Resolution	Main stream: WVGA, 720P, D1 Sub stream: CIF, WVGA, QVGA, 1080P, D1
Frame Rate	PAL: 25 fps NTSC: 30 fps
Video Bit Rate	256K to 4M
Light Compensation	Auto IR
D/N	ICR auto switch
Audio Compression	G.711Mu; G.711u; PCM
Audio Input	1
Audio Output	Built-in speaker
Audio Mode	Two-way audio
Audio Enhancement	Echo suppression and cancellation/digital noise reduction
Audio Bit Rate	16KHz, 16Bit
Function	
Communication	Fully digital
Unlock Mode	Card/App/indoor monitor unlock
Card Type	IC card
Motion Detection	Video Motion Detection
Auto Snapshot	Auto snapshot can only be enabled on indoor monitors
Leave Photos and Messages	Yes (Insert an SD card into the indoor monitor.)
Web Configuration	Yes
Performance	
Card Reading Distance	3cm-5cm
Casing	PC + Aluminum alloy, metal frame
Capacity	
Card Capacity	10,000
Port	
RS-485	1
Electric Lock	1
Alarm Input	1
Alarm Output	1
Exit Button	1
Door Status Detection	1
Lock Control	1, normally closed by default
Network	1 10Mbps/100Mbps network port (8-core white ribbon cable)

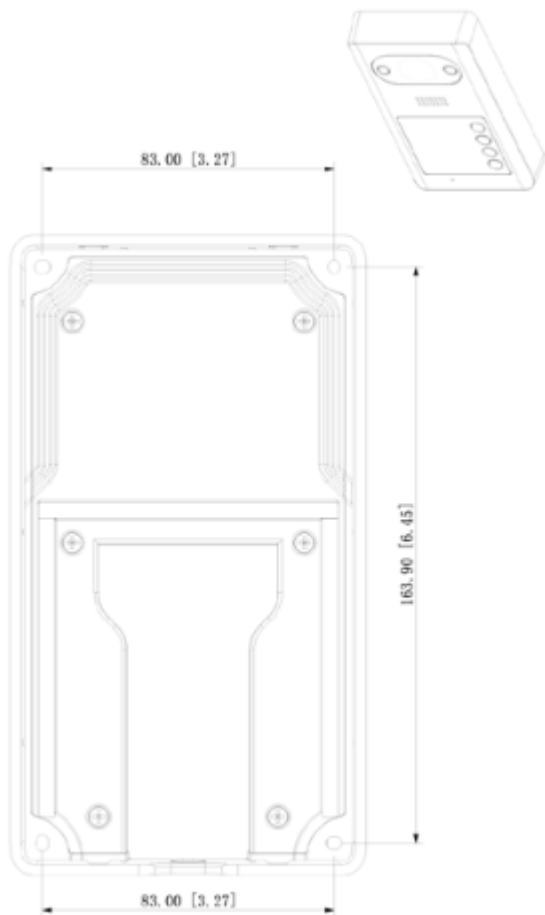

Alarm	
Tamper Alarm	Yes
General	
Color	Greyish-black
Power Supply	12V DC 1A Standard PoE
Installation	Surface mount
Certifications	CE/FCC
Accessory	Alarm ribbon cable
Dimensions	181 mm×101 mm×31 mm (7.13" × 3.98" × 1.22")
Protection Grade	IP65 (silicone sealant is needed, see the quick start guide) IK08
Operating Temperature	-30°C to + 60°C (-22°F to +140°F)
Operating Humidity	10%RH-95%RH (non-condensing)
Operating Environment	Outdoor
Operating Altitude	Beneath 3000 m (9842.51 ft)
Power Consumption	Standby≤1W, working≤7W
Gross Weight	660 g (5.51 lb)